

# Tundra Engine Skid Plate

2007-2021 Tundra 4wd




Remove original hardware securing front bumper tabs to factory skid plate. New hardware is supplied for install.




Remove factory skid plate bolts. Swing skid plate down and shift to the driver side to unhook from frame.



**If retaining factory bumper-** Insert supplied bumper bolts into front square holes of Engine Skid Plate.

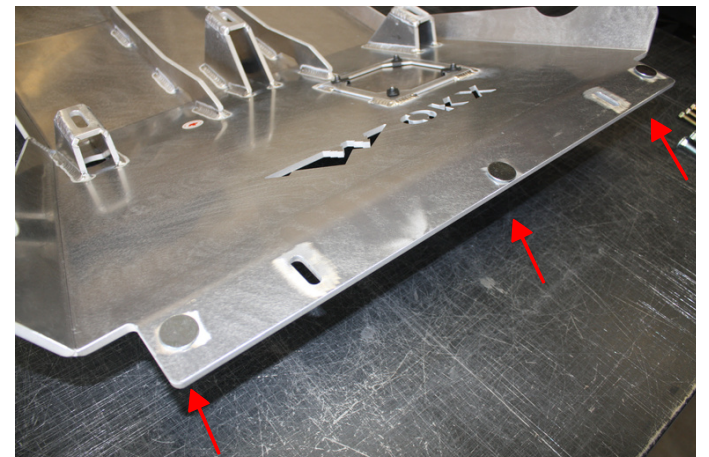

Bumper bolts should be facing down as shown. **Be sure these remain seated when installing Skid Plate.**

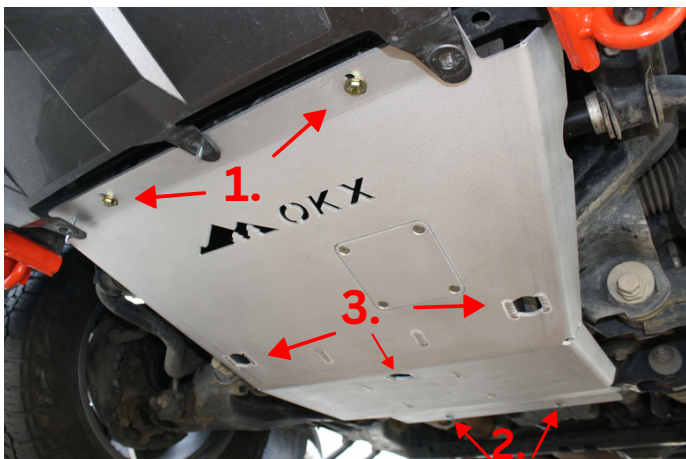

Lift Skid Plate into position behind the bumper tabs.

1. Install 2 M8x30mm bolts w/ washers at front.
2. Install 3/8" carriage bolts w/ large washers & locknuts through rear crossmember.
3. Install remaining M8x30mm bolts w/ washers.



Check clearances and adjust Skid Plate if needed.

**Tighten Skid Plate hardware to 28ft-lbs.**

**For factory bumper-** position bumper tabs over 1/4" bumper bolts. Install supplied 1/4" fender washers and secure with locknuts. **Do not overtighten.**